

→ Reverse osmosis

# RO MAT

(Ref. 404141)

## SPECIFICATIONS

DIMENSIONS	181 mm x 183 mm x 334 mm
WEIGHT	3,5 kg
FLOW	0,26 LPM
TEMPERATURE (max. - min.)	40 ° C - 2 ° C
INLET TDS (max.)	2000 ppm
PRESSURE (max. - mmn.)	1 / 4 bar 100 - 400 Kpa
MEMBRANE	75 GPD
FAUCET	1 way
PUMP	Booster
TANK	External pressurized tank
POWER SUPPLY	24 Vdc 1,75A 42W
EXTERNAL ADAPTER	100 - 240V. 50/60Hz

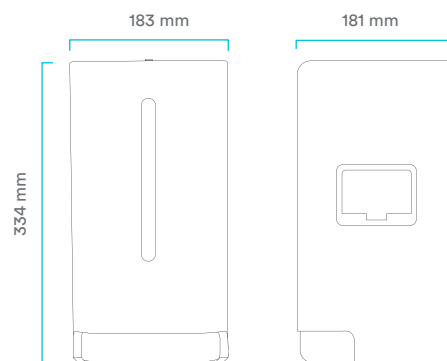
EXTERNAL  
PRESSURIZED TANKPRESSURE  
PUMPFILTER  
CONTROLSOUND  
WARNINGSLED  
STATUSSAFETY  
LOCKPROGRAMMABLE  
EQUIPMENTAUTOMATIC  
FLUSHING

## ORIGINAL CONSUMABLES

Combination filter pp + Carbon Block (Ref: 404139)

RO Membrane 75 GPD (Ref: 404140)

Postfilter GAC (Ref: 651201)

ACREDITADO POR ENAC  
Certif. nº 34/5200/14/0712

WLG (B-60326279), es miembro de la Water Quality Association.

La comercialización de equipos de tratamiento de aguas y electrodomésticos, así como la impartición de formación no reglada relacionada con la tecnología de los equipos comercializados, están certificados y son conformes a la norma UNE-ISO-9001 para WLG (B-60326279).

WLG (B-60326279) es socio de Aqua España, perteneciendo esta asociación a Aqua Europa (Federación de asociaciones nacionales europeas).

WLG (B-60326279), posee la concesión de la autorización de Operador Económico Autorizado (OEA), con el número ESAEOF18000008U6 y fecha de entrada en vigor de la autorización 13/02/2018.