

→ UV LED 25L WITH HIGH GERMICIDAL POWER

# KINGLIGHT UV LED 25LPM

(Ref. 243620)

## DESCRIPTION

Ideal equipment for the elimination of germs and microorganisms from water supplied by UV-C radiation.

## CHARACTERISTICS

MAIN AMTERIAL	PP, aluminum alloy
INPUT VOLTAGE	100V*240V 50/60Hz
OUTPUT VOLTAGE	24 Vdc 2A
WORKING TEMPERATURE	2°C - 65°C
PRESSURE	0,8 MPa
CONNECTIONS	3/4"
WORKING FLOW OSMOSIS WATER	25L/min
STERILIZATION RATE	≥99,9 (E. Coli) @≤25 LPM
SERVICE LIFE	3.000h
POWER	23W
GRADE WATER-PROOF	x7



Blue  
Waiting



Green  
In operation




Red  
End of useful life



## FUNCTIONALITIES

Built-in flow switch.  
It is activated when water flows and deactivated when water flow stops.  
Does not heat the water.  
Built-in LED status control.

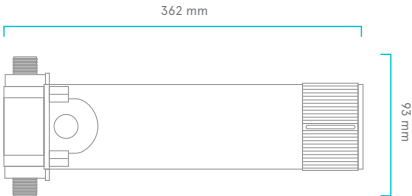

WLG (B-60326279), is member of the Water Quality Association.



ACREDITED BY **ENAC**  
Certif. nº 34/5200/14/0712

The trading of water treatment and household appliances as well as teaching of non-official training courses related with its technology, are certified and comply with the UNE-ISO-9001 far WLG (B-60326279).



WLG (B-60326279) is an Aqua España member, who belongs Aqua Europa (Federation of European nation associations).



WLG (B-60326279), has the rights granted for Authorized Economic Operator with number ESAEO18000008U6 and 13/02/2018 as a date of entry of the authorization.