

→ Reverse osmosis

# RO LYKKE

(Ref.911160)

Direct Flow system

## DESCRIPTION

5-stage equipment  
Installation kit  
Intelligent faucet with status messages  
High-performance membrane with self-flushing  
Integrated hydraulic circuit  
Easy maintenance

## SPECIFICATIONS


WEIGHT	12,5 kg
FLOW	1,6-2,1 lpm
TEMPERATURE (max. - min.)	38 ° C - 5 ° C
INLET TDS (max.)	1500 ppm
PRESSURE (max. - mmn.)	4 - 1 bares (400kPa - 100kPa)
MEMBRANE	800 GPD
FAUCET	Smart faucet
PUMP	Booster
POWER SUPPLY	24VDC / 36VDC
EXTERNAL ADAPTER	230VAC 50/60 Hz

QUALITY  
CONTROLDOUBLE  
FLOWFILTER  
CONTROLCAPSULATED  
MEMBRANEFLUSHING  
READYPRESSURE  
PUMPLED  
STATUS
**WATER QUALITY  
WARNING**

## ORIGINAL CONSUMABLES

Combined pre-filter pp 5 µm+charcoal GAC (Ref. 910540)

Membrane RO 600 GPD ( Ref. 910541)

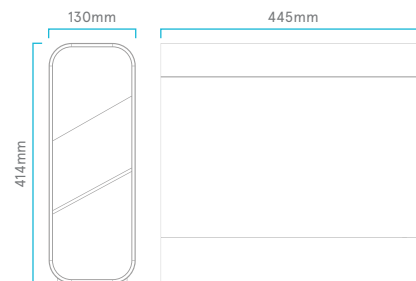

WLG (B-60326279), is member of  
the Water Quality Association.



ACCREDITED BY ENAC  
Certif. nº 34/5200/14/0712

The trading of water treatment and  
household appliances as well as  
designing and teaching of  
non-official training courses related  
with its technology are certified and  
comply with the UNE-ISO-9001 far  
WLG (B-60326279).



WLG (B-60326279) is an Aqua  
España member, who belongs Aqua  
Europa (Federation of European  
nation associations).



WLG (B-60326279), has the rights  
granted for Authorized Economic  
Operator with number  
ESAE0F18000008U6 and  
13/02/2018 as a date of entry of the  
authorization.