

→ UV LED 15L WITH HIGH GERMICIDAL POWER

KINGLIGHT UV LED 15LPM

(Ref. 243619)

DESCRIPTION


Ideal equipment for the elimination of germs and microorganisms from water supplied by UV-C radiation.

CHARACTERISTIC


MAIN MATERIAL	PP, Aleación de aluminio
INPUT VOLTAGE	100V-240V 50/60Hz
OUTPUT VOLTAGE	24 Vdc 1,5A
WORKING TEMPERATURE	2°C - 65°C
PRESSION	0,8 MPa
CONNECTIONS	1/2"
WORKING FLOW OSMOSIS WATER	15L/min
MINIMUM FLOW REQUIRED FOR ACTIVATION	2L/min
STERILIZATION RATE	≥99,9 (E. Coli) @≤15 LPM
SERVICE LIFE	3.000h
POWER	17W
GRADE WATER-PROOF	x7



Blue
Waiting



Green
In operation



Red
End of useful life




FUNCTIONALITIES

Built-in flow switch.

It is activated when water flows and deactivated when water flow stops.

Does not heat the water.

Built-in LED status control.

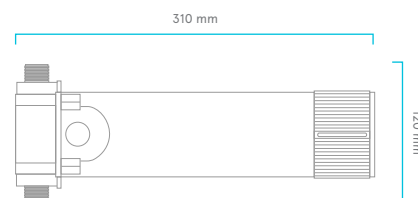

WLG (B-60326279), is member of the Water Quality Association.



ACCREDITED BY ENAC
Certif. nº 34/5200/14/0712

The trading of water treatment and household appliances as well as teaching of non-official training courses related with its technology, are certified and comply with the UNE-ISO-9001 for WLG (B-60326279).



WLG (B-60326279) is an Aqua España member, who belongs Aqua Europa (Federation of European nation associations).



WLG (B-60326279), has the rights granted for Authorized Economic Operator with number ESAEO18000008U6 and 13/02/2018 as a date of entry of the authorization.