

→ UV LED 15L WITH HIGH GERMICIDAL POWER

KINGLIGHT UV LED 15LPM

(Ref. 243619)

DESCRIPTION

Ideal equipment for the elimination of germs and microorganisms from water supplied by UV-C radiation.

CHARACTERISTIC


| | |
|---|--------------------------|
| MAIN MATERIAL | PP, Aluminum alloy |
| ELECTRICAL SUPPLY | 100V-240V 50/60Hz |
| POWER | 17W |
| OUTPUT VOLTAGE | 24 Vdc 1,5A |
| WORKING TEMPERATURE | 2°C - 65°C |
| PRESSION | 0,8 MPa |
| CONNECTIONS | 1/2" |
| WORKING FLOW OSMOSED WATER | 15L/min |
| WORKING FLOW OF FILTERED WATER 10 MICRONS | 7-11 L/min |
| MINIMUM FLOW REQUIRED FOR ACTIVATION | 2L/min |
| STERILIZATION RATE | ≥99,9 (E. Coli) @≤15 LPM |
| SERVICE LIFE | 3.000h |
| GRADE WATER-PROOF | x7 |




Blue
Waiting



Green
In operation



Red
End of useful life

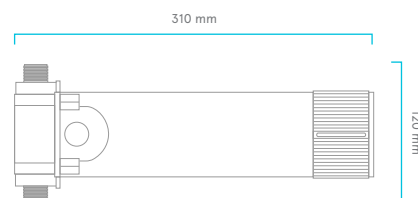

FUNCTIONALITIES

Built-in flow switch.

It is activated when water flows and deactivated when water flow stops.

Does not heat the water.

Built-in LED status control.



WLG (B-60326279), is member of the Water Quality Association.



ACCREDITED BY ENAC
Certif. nº 34/5200/14/0712

The trading of water treatment and household appliances as well as teaching of non-official training courses related with its technology, are certified and comply with the UNE-ISO-9001 far WLG (B-60326279).



WLG (B-60326279) is an Aqua España member, who belongs Aqua Europa (Federation of European nation associations).



WLG (B-60326279), has the rights granted for Authorized Economic Operator with number ESAEOP18000008U6 and 13/02/2018 as a date of entry of the authorization.