

→ Direct Flow system reverse osmosis

RO RUWA 600 GPD

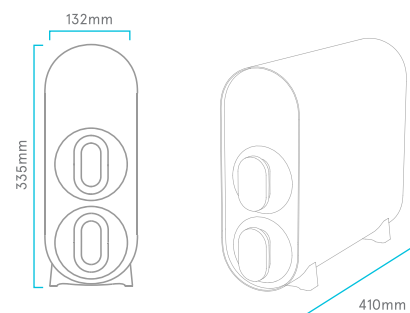
(Ref.910996)

DESCRIPTION

5-stage equipment
Installation kit
Intelligent faucet with status messages
High-performance membrane with self-flushing
Integrated hydraulic circuit
Easy maintenance

SPECIFICATIONS

DIMENSIONS	410 mm x 132 mm x 335 mm
WEIGHT	12,5 kg
FLOW	1,8 LPM
TEMPERATURE (max. - min.)	38 ° C - 5 ° C
INLET TDS (max.)	1500 ppm
PRESSURE (max. - mmn.)	4-1 bares 400 - 100 kPa
MEMBRANE	600 GPD
FAUCET	Smart faucet
PUMP	Booster
POWER SUPPLY	24VDC 96W
EXTERNAL ADAPTER	100-240VAC 50/60 Hz 4A

QUALITY
CONTROLDOUBLE
FLOWFILTER
CONTROLCAPSULATED
MEMBRANEFLUSHING
READYSOUND
WARNINGSSMART
FAUCETLED
STATUSANTIFOULING
PEARLS
**ANTIFOULING
PEARLS**


ORIGINAL CONSUMABLES

Combination filter pp + Carbon Block (Ref. 910998)

RO Membrane 600 GPD (Ref. 910999)



WLG (B-60326279), is member of
the Water Quality Association.



ACCREDITED BY ENAC
Certif. nº 34/5200/14/0712

The trading of water treatment and
household appliances as well as
designing and teaching of
non-official training courses related
with its technology are certified and
comply with the UNE-ISO-9001 far
WLG (B-60326279).



WLG (B-60326279) is an Aqua
España member, who belongs Aqua
Europa (Federation of European
nation associations).



WLG (B-60326279), has the rights
granted for Authorized Economic
Operator with number
ESAE0F18000008U6 and
13/02/2018 as a date of entry of the
authorization.