

→ Direct Flow Reverse Osmosis

RO COMERCIAL 2000G V.2.0

(Ref. 796221)

DESCRIPTION

Reverse osmosis equipment special HORECA
Installation kit
High performance membranes

SPECIFICATIONS

WATER PRODUCTION RO	hasta 4,5 l/min.
MEMBRANES RO	2 x Membrana 3313 de 1000 GPD
PRESSURE SYSTEM	Bomba 600 l/h
MAX. PRODUCTION RECOMMENDED	4000 l/día
MAX. HARDNESS	15° HF
CONVERSION	45%
POWER SUPPLY	220-240 VAC, 50 Hz
LEAK PROTECTION	Aquastop sensor de fugas incluido
INLET PRESSURE	1 - 4 bar.
INLET TEMPERATURE	3° - 38°C
DIMENSIONS	660 x 265 x 530 mm




INPUT CONNECTIONS

INPUT	DRAIN	PRODUCTION
Tubo 1/2"	Tubo 3/8"	Tubo 3/8"

ORIGINAL COMPONENTS

Ref. 980804 3 x AQUA PRO 21' Logic carbon pre-filters
Ref. 450713 2 x Osmosis membranes type 3313 with 1000 GPD
Ref. 980811 Spare inner carbon filter cartridge
Ref. 796224 Equipment with digital conductivity meter installed

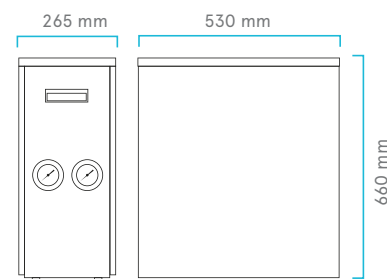

WLG (B-60326279), is member of the Water Quality Association.



ACCREDITED BY ENAC
Certif. nº 34/5200/14/0712

The trading of water treatment and household appliances as well as designing and teaching of non-official training courses related with its technology are certified and comply with the UNE-ISO-9001 far WLG (B-60326279).



WLG (B-60326279) is an Aqua España member, who belongs Aqua Europa (Federation of European nation associations).



WLG (B-60326279), has the rights granted for Authorized Economic Operator with number ESAEOF18000008U6 and 13/02/2018 as a date of entry of the authorization.