


→ Columbia Aqua Filtration Dispenser

FC-1750 F / UF

(Ref. 728652 / 728653)

SPECIFICATIONS

TEMPERATURE	Cold
WORKING SYSTEM	Filtration / Ultrafiltration
COLD WATER TEMPERATURE	8 - 12°C
COOLING CAPACITY	20 L/H
OUTLET FLOW	60 L
TEMPERATURE CONTROL	Thermostat
COLD WATER TANK CAPACITY	4,2 liters
COLD WATER TANK MATERIAL	AISI 304 Stainless Steel
COOLING POWER	200 W
POWER SUPPLY	200 - 240 VAC
REFRIGERANT COMPRESSOR	R - 134a (110 gr)
WEIGHT	26,5 Kg
PRESENTATION	Floor
WATER TREATMENT SYSTEM	F: 1 Prefilter (5 µm 2,5 x 11,5) 1 filter (GAC 2,5 x 11,5) UF: 1 Filter (5 µm 2,5 x 11,5) 1 filter (GAC 2,5 x 11,5) 1 UF Membrane

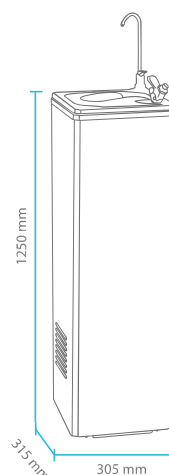

DECREASE OF
SOFTENERS AND
DETERGENTS



BETTER FOR
SENSITIVE SKIN



DIRECT ACCESS



LEAKING SENSOR
Automatic system
leak detection



EASY TO
USE



WLG (B-60326279), is member of the Water Quality Association.



ACCREDITED BY **ENAC**
Certif. nº 34/5200/14/0712

The trading of water treatment and household appliances as well as teaching of non-official training courses related with its technology, are certified and comply with the UNE-ISO-9001 for WLG (B-60326279).



WLG (B-60326279) is an Aqua España member, who belongs Aqua Europa (Federation of European nation associations).



WLG (B-60326279), has the rights granted for Authorized Economic Operator with number ESAEOF18000008U6 and 13/02/2018 as a date of entry of the authorization.