

→ Reverse osmosis Direct flow

MYNDER 600GPD v2.0

(Ref.911264)

SPECIFICATIONS

MAXIMUM FLOW	1,8 lpm *
WEIGHT	12.45 kg
INLET TEMPERATURE (max.-min.)	38°C / 5°C
INLET TDS	1500 ppm
MAXIMUM HARDNESS RECOMMENDED	15 °F
INLET PRESSURE	4 bar - 2 bar (400kPa-200kPa)
PREFILTER	5 micron polypropylene and carbon high quality block
MEMBRANE	600GPD
FAUCET	1 way
PUMP	High performance booster
POWER SUPPLY	24 VDC 2,5 A
EXTERNAL POWER ADAPTER	100V. 240 Vac 50/60Hz: 24Vdc 96W
DRAIN RESTRICTOR	Easy to access and clean



FILTER
CONTROL



SOUND
WARNINGS



LED
STATUS



VERSATILITY



HIGH
EFFICIENCY



TDS CREEP TIMED
RECIRCULATION



ECO
PACK




CONEXIÓN

Inlet connection	3/8"
Faucet connection	1/4"
Drain connection	1/4"

CONSUMIBLES ORIGINALES

Combinated filter. (Ref. 911061)
Reverse osmosis membrane (Ref. 911062)
Prefiltro Starfit (Ref. 953002)

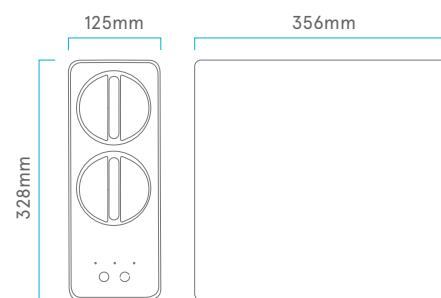

* Depending on the characteristics
of the water to be treated.



ACREDITADO POR ENAC
Certif. nº 34/5200/14/0712



WLG (B-60326279), is a member of
the Water Quality Association.

The marketing of water treatment
equipment and household appliances,
as well as the provision of non-regulated
training related to the technology of the
equipment marketed, are certified and
comply with the UNE-ISO-9001
standard for WLG (B-60326279).

WLG (B-60326279) is a member of
Aqua España, which belongs to Aqua
Europa (Federation of European
national associations).

WLG (B-60326279), has been
granted Authorised Economic
Operator (AEO) authorisation
number ESAEOF18000008U6 and
the authorisation came into force on
13/02/2018.