

→ Direct Flow Reverse Osmosis

# RO BOLT 1000 EVO

(Ref. 911392)

## SPECIFICATIONS

RO WATER PRODUCTION	2,4 l/min
WEIGHT	11 kg
INLET TEMPERATURE (max.-min.)	38°C / 5°C
INLET TDS (max.)	1500 ppm
INLET PRESSURE	4 bar - 1 bar (400kPa-100kPa)
MEMBRANE	1000 GPD
FAUCET	Smart faucet
PUMP	Diaphragm Booster Pump of high performance
POWER SUPPLY	24 Vdc 7A 168W
EXTERNAL ADAPTER	200-240V. 50/60Hz
PRE-FILTER	Triple - 5-micron sediment, 10-micron activated carbon block, and 10-micron post activated carbon block

## ORIGINAL SUPPLIES

Triple pre-filter PP + carbon + post-filter (Ref. 910718)

RO membrane 1000 GPD (Ref. 911098)

## OPTIONAL ACCESSORIES

KINGLIGHT UV LED 7L (Ref. 243618)

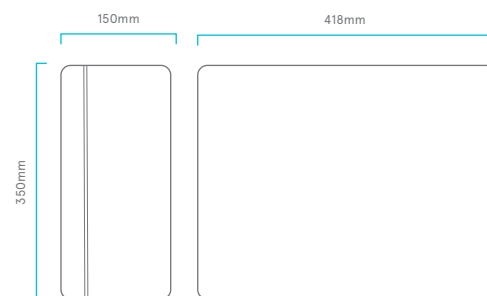
## MAINTENANCE ALERT SYSTEM

11 MONTHS - Maintenance light alert system

12 MONTHS - Acoustic maintenance alert system

15 MONTHS - System lock

**Security lock for high consumption** - The system gives you a warning when consuming 5000 liters to prevent chlorine from entering the membrane

TDS  
CREEPFILTER  
CONTROLQUALITY  
CONTROLSOUND  
WARNINGSSMART  
FAUCETLED  
STATUSSECURITY  
LOCKHIGH  
EFFICIENCYAQUASTOP  
SYSTEMANTIFOULING  
PEARLS

WLG (B-60326279), is member of the Water Quality Association.



ACCREDITED BY ENAC  
Certif. n° 34/5200/14/0712

The trading of water treatment and household appliances as well as designing and teaching of non-official training courses related with its technology are certified and comply with the UNE-ISO-9001 far WLG (B-60326279).



WLG (B-60326279) is an Aqua España member, who belongs Aqua Europa (Federation of European nation associations).



WLG (B-60326279), has the rights granted for Authorized Economic Operator with number ESAEOF18000008U6 and 13/02/2018 as a date of entry of the authorization.