

## Icehome R80 water cooler

Icehome will increase your portfolio of clients, by offering an additional complement for their domestic reverse osmosis system. Cold and room temperature water with all the comfort.



Code	Packaging units	Description	Connections
728802	1	Icehome R80	3/8"

➔ 2 way faucets, pages 160 and 164.



## Regulators

### Accessories for domestic reverse osmosis systems



Code	Packaging units	Description
341100	1	Pressure gauge 1/8"



Code	Packaging units	Description
276700	1	Special connector for pressure gauge 1/4"-1/8"-1/4"
276600	1	Special connector for pressure gauge 3/8"-1/8"-1/4"



Code	Packaging units	Description
138800	1	Special 1/8" double male brass connector



Code	Packaging units	Description
577603	1	Pressure regulator with 1/4" connectors and maximum pressure gauge 10 kg/cm <sup>2</sup>
577602	1	Pressure regulator without accessories



Code	Packaging units	Description	Connection
953163	1	Pressure reducing valve (2.7 bar/40 PSI)	QC 1/4"
953164	1	Pressure reducing valve (2.7 bar/40 PSI)	QC 3/8"
953172	1	Pressure reducing valve (4.8 bar/70 PSI)	QC 1/4"



Code	Packaging units	Description	Connection
771606	1	Mechanical leaking sensor	QC 1/4"



Code	Packaging units	Description
771607	1	Mechanical leaking sensor sponge replacement



Code	Packaging units	Description
750489	1	Electronic leaking sensor with batteries

CS FILTER RANGE IS MANUFACTURED ACCORDING TO THE HIGHEST QUALITY STANDARDS.



Components

**STARFIT**  
Starfit: highest quality components. High reliability.



**Green Filter**  
We manufacture and distribute our filters. Cultivate the loyalty of your clients, keep them satisfied and avoid unauthorised practice with CS filters.

**CS**  
Easy and quick connection.



**I+D**  
The excellent hydraulic design will prevent pressure drop and premature dirtiness. Designed and developed by the R+D department from Puricom.

**CALGON**  
Activated carbon guarantee for the highest quality with UNE EN 12915-1 certificate.

Maximum service life. Manufactured using the best plastic materials. Maximum working pressure 8.6 bar.



CS filters



Code	Packaging units	Description
291803	25	5 µm CS sediment filter. Removes solid particles and water turbidity. Filtering media: melt blown polypropylene. Nominal filtration: 5 micron. Service life: 1 year / 11300 L / 3000 g. (Depending on the characteristics of water). Max. flow: 3.78 LPM / 1 GPM.



Code	Packaging units	Description
291902	25	CS granular activated carbon filter. Removes the substances and particles that generate odours and tastes. Retention/reduction of free chlorine present in water. Reduction of the quantity of organic compounds, trihalomethanes and COD. Filtering media: granular activated carbon from coconut shell. 20 x 40 Mesh. Acid-washed activated carbon. Service life: 1 year / 8300 L / 2200 g. (Depending on the characteristics of water / 1 ppm of free chlorine). Max. flow: 1.9 LPM / 0.5 GPM.



Components



Code	Packaging units	Description
291933	25	PP-GAC combi cartridge

## CS Post-filters



Quick assembly CS filters.  
 Diameter: 2".  
 Length: 10".  
 Inlet connection: 3/8" stem.  
 Outlet connection: M 1/4" thread.  
 Housing material: polypropylene.  
 Temperature: 4 °C - 38 °C.  
 Max. pressure: 8,6 bar.



Code	Packaging units	Description
291919	25	CS granular activated carbon filter. Removes the substances and particles that generate odours and tastes. Filtering media: granular activated carbon from coconut shell. Service life: 1 year / 5600 L / 1400 g. (Depending on the use and the characteristics of water). Max. flow: 1.9 LPM / 0.5 GPM.



Code	Packaging units	Description
291901	25	CS granular activated carbon + Ag. Removes the substances and particles that generate odours and tastes. Bacteriostatic action. Filtering media: granular activated carbon from coconut shell. Impregnated with silver nanoparticles. Service life: 1 year / 6400 L / 1700 g. (Depending on the use and the characteristics of water). Max. flow: 1.9 LPM / 0.5 GPM.



Code	Packaging units	Description
291920	25	Remineralizing carbon. Removes the substances and particles that generate odours and tastes. Remineralization and pH regulation. Filtering media: granular activated carbon + remineralizing media. Service life: 6 - 12 months / 3000 L / 800 g. (Depending on the use and the characteristics of water) Max. flow: 1.9 LPM / 0.5 GPM.



Code	Packaging units	Description
206601	25	CS Cartridge Wrench

## IN-LINE Greenfilter Quality filters



Components



### Specifications:

Temperature: 4 °C - 38 °C.

Max. pressure: 8,6 bar.

IN-OUT - Female screw 1/4"



#### 2''x10'' Filtration cartridge

Code	Packaging units	Length	Diameter	Filtration	Connection
291400	25	10''	2''	5 µm	1/4" - F



#### 2.5''x11'' Filtration cartridge

Code	Packaging units	Length	Diameter	Filtration	Connection
291300	25	11''	2,5''	5 µm	1/4" - F



#### 2.5''x11'' Activated carbon cartridge

Code	Packaging units	Length	Diameter	Filtration	Connection
291500	25	11''	2,5''	GAC carbon	1/4" - F



#### 2''x10'' Activated post-carbon cartridge

Code	Packaging units	Length	Diameter	Filtration	Connection
291600	25	10''	2''	GAC carbon	1/4" - F



#### 2''x10'' Remineralizer cartridge

Code	Packaging units	Length	Diameter	Filtration	Connection
790200	25	10''	2''	Remineralizer	1/4" - F



#### 2''x10'' Activated post-carbon with silver cartridge

Code	Packaging units	Length	Diameter	Filtration	Connection
291604	25	10''	2''	GAC In-Line	1/4" - F



#### 2''x10'' In-Line carbon and polyphosphates

Code	Packaging units	Length	Diameter	Filtration	Connection
291619	25	10''	2''	Polyphosphates	1/4" - F

## IN-LINE Classic filters



Components

**Specifications:**

Temperature: 38 °C - 4 °C.

Max. pressure: 8,6 bar.

IN-UT - Female screw 1/4"

**2,5" Classic filtration cartridge**

Code	Packaging units	Length	Diameter	Filtration	Connection
291308	20	11"	2,5"	5 µm	1/4" - F

**2,5" Classic filtration cartridge**

Code	Packaging units	Length	Diameter	Filtration	Connection
757100	20	11"	2,5"	1 µm	1/4" - F

**2,5" Classic activated carbon cartridge**

Code	Packaging units	Length	Diameter	Filtration	Connection
291507	20	11"	2,5"	GAC carbon	1/4" - F

**2" Classic activated carbon cartridge**

Code	Packaging units	Length	Diameter	Filtration	Connection
291617	25	10"	2"	GAC post-carbon	1/4" - F

**2" Classic remineralizer cartridge**

Code	Packaging units	Length	Diameter	Filtration	Connection
291627	25	10"	2"	Remineralizer	1/4" - F

## IN-LINE quick connector filters



Components



### Specifications:

Temperature: 38°C - 4°C.  
Max. pressure: 8,6 bar.



#### Quick Connect filtration cartridge 2''x10''

Code	Packaging units	Length	Diameter	Filtration	Connection
651203	25	10''	2''	5 µm	QC-1/4''



#### Quick Connect filtration cartridge 2,5''x11''

Code	Packaging units	Length	Diameter	Filtration	Connection
651204	25	11''	2,5''	5 µm	QC-1/4''



#### Quick Connect activated carbon cartridge 2.5''x11''

Code	Packaging units	Length	Diameter	Filtration	Connection
651202	25	11''	2,5''	GAC carbon	QC-1/4''



#### Quick Connect activated carbon cartridge 2''x10''

Code	Packaging units	Length	Diameter	Filtration	Connection
651201	25	10''	2''	GAC post-carbon	QC-1/4''



#### Quick Connect remineralizer cartridge 2''x10''

Code	Packaging units	Length	Diameter	Filtration	Connection
790210	25	10''	2''	Remineralizer post	QC-1/4''

## Standard filters

### Pressed polypropylene cartridge



Components

#### Specifications:

Filtering media: melt blown polypropylene.  
 Internal diameter / external diameter:  
 28 mm / 64 mm.  
 Efficiency: 95 %.  
 Max. pressure: 6 bar.  
 Max. differential pressure: 5 bar at 21 °C.  
 Max. temperature: 65 °C.

#### PP cartridge



Code	Packaging units	Height	Filtration	Flow L/h
209100	25	10"	1 µm	800
209200	25	10"	5 µm	1500
209300	25	10"	10 µm	2000
209400	25	10"	20 µm	2500
209500	25	10"	50 µm	2600

#### Specifications:

Filtering media: granular activated carbon.  
 Internal diameter / external diameter:  
 28 mm / 72 mm.  
 Max. pressure: 6 bar.  
 Max. differential pressure: 0,8 bar at 20 °C.  
 Max. temperature: 50 °C.

#### Granular activated carbon cartridge (GAC)



Code	Packaging units	Height	Filtration	Flow L/h
213600	25	10"	Granular carbon (GAC)	220
213700	25	20"	Granular carbon (GAC)	480

#### Specifications:

Filtering media: compact activated carbon and polypropylene filtering mesh.  
 Internal diameter / external diameter: 28 mm / 70 mm.  
 Max. pressure: 6 bar.  
 Max. differential pressure: 0,8 bar at 20 °C.  
 Max. temperature: 50 °C.

#### Compact activated carbon cartridge (BLOCK)



Code	Packaging units	Height	Filtration	Flow L/h
214000	25	10"	10 µm	220
214100	25	20"	10 µm	480



## Maintenance packs



Components



Code	Packaging units	Description
763300	10	Pack 3. Box with filter set containing the assembly and maintenance instructions. Includes: Code 209200. 5 µm pressed polypropylene cartridge 9 3/4". Code 213600. GAC activated carbon cartridge 9 3/4". Code 214000. BLOCK pressed carbon cartridge 9 3/4".



Code	Packaging units	Description
763308	10	Pack 4. Box with filter set containing the assembly and maintenance instructions. Includes: Code 209200. 5 µm pressed polypropylene cartridge 9 3/4". Code 213600. GAC activated carbon cartridge 9 3/4". Code 214000. BLOCK pressed carbon cartridge 9 3/4". Code 291600. In-line activated carbon 2" x 10".



Code	Packaging units	Description
763315	10	Pack 4. Box with filter set containing the assembly and maintenance instructions. Includes: Code 209200. 5 µm pressed polypropylene cartridge 9 3/4". Code 213600. GAC activated carbon cartridge 9 3/4". Code 214000. BLOCK pressed carbon cartridge 9 3/4". Code 291627. Remineralizer In-line cartridge 2" x 10".



## Greta filters



### Cartridge for model Greta

Code	Packaging units	Description
648200	25	Replacement cartridge for RO Greta (CMJ)



Code	Packaging units	Description
728900	25	Special wrench for Greta cartridges and quick connectors



Code	Packaging units	Description
291900	25	GAC granular activated carbon



## Reverse osmosis cartridge C.A. model

### Specifications:

Filtering media: depending on the cartridge.

Max. pressure: 6 bar.

Max. temperature: 45 °C.



### Previous to 2013 versions

Code	Packaging units	Description	Material
724000	20	Filtration cartridge 5 µm	PP



Code	Packaging units	Description	Material
723900	20	GAC granular activated carbon	GAC carbon



Code	Packaging units	Description	Material
790206	20	Post-filter	GAC carbon
790207	20	Post-filter assembly kit	



### 2013 Version onwards

Code	Packaging units	Description	Material
724009	20	Filtration cartridge 5 µm	PP



Code	Packaging units	Description	Material
724008	20	GAC granular activated carbon	GAC carbon

## Filmtec and Greenfilter RO membranes



Components

# NSF

According to the requirements of NSF.

(Depending on model).

### Specifications:

Made of polyamide and spirally rolled up.

PH range: 2 - 11.

Max. temperature: 45 °C.

Max. SDI: 5.

Max. free chlorine: <0,1 ppm.

Service life: 2 to 5 years.

(Depending on the use and the characteristics of water).

### 1812 Filmtec membranes

Code	Packaging units	Brand	Production	Max. pressure bar	Salt rejection %
292400	25	Filmtec	50 GPD	10	98
292500	25	Filmtec	75 GPD	10	98
648100	25	Filmtec	100 GPD	21	90

## Greenfilter membranes



Components

# NSF

According to the requirements of NSF.

(Depending on model).

### Specifications:

Made of polyamide and spirally rolled up.

PH range: 2 - 11.

Max. temperature: 45 °C.

Max. SDI: 5.

Max. free chlorine: <0,1 ppm.

Service life: 2 to 5 years.

(Depending on the use and the characteristics of water).

### Greenfilter 1812 membranes except ref. 292704: 2012

Code	Packaging units	Brand	Production	Max. pressure bar	Salt rejection %
767201	25	Greenfilter	50 GPD	10	98
767202	25	Greenfilter	75 GPD	10	98
767203	25	Greenfilter	100 GPD	10	90
292701	25	Greenfilter	150 GPD	10	98
292704	25	Greenfilter	180 GPD	10	97

### 3012/3013/3213 membranes

Code	Packaging units	Brand	Production	Max. pressure bar	Salt rejection %
292703	16	Greenfilter	3012/300 GPD	10	95
292707*	16	Greenfilter	3013/400 GPD	10	95
450702**	1	Greenfilter	3213/600 GPD	10	95
450713	1	Greenfilter	3313/1000 GPD	10	95

\*BEAQUA model, RO C500.

\*\*AQUABIER model, RO C700, RO C1200.

# recomax

MEMBRANE TECHNOLOGY

New

REVERSE OSMOSIS ULTRASAVER MEMBRANE  
HIGH PERFORMANCE

LOW REJECTION · HIGH WATER SAVING · ECO FRIENDLY



**\*PERMEATE  
WATER**



**REJECTION  
WATER**

\* Data obtained as manufacturer's specifications  
with a TDS of 600 ppm and a temperature of 25°C

Code	Packaging units	Brand	Max. pressure bar	Salt rejection %
292718	25	Recomax 1-1	10	98
292722	25	Recomax 1-1 capsulated	10	98

## Capsulated Greenfilter RO membranes

Check valve already built-in



### Specifications:

Maximum hygiene.

Made of polyamide and spirally rolled up.

PH range: 2 - 11.

Max. temperature: 45 °C.

Max. SDI: 5.

Max. free chlorine: <0,1 ppm.

Service life: 2 to 5 years.

(Depending on the use and the characteristics of water).

Code	Packaging units	Brand	Production	Max. pressure bar	Salt rejection %
717701	25	Greenfilter	50 GPD	10	98
717704	25	Greenfilter	75 GPD	10	98
717703	25	Greenfilter	100 GPD	10	98
292708	25	Greenfilter	150 GPD	10	98
292709	25	Greenfilter	180 GPD	10	98

### Reverse osmosis membrane housings



Code	Packaging units	Description
292900	35	20 x 12 plastic housing for membrane
713900	1	O-ring for membrane housing 20 x 12
206601	1	Membrane housing wrench 20 x 12



Code	Packaging units	Description
292702	1	30 x 12 plastic membrane housing
292706	1*	30 x 13 plastic membrane housing
450703	1**	32 x 13 plastic membrane housing
450714	1	33 x 13 plastic membrane housing
450715	1	Wrench

\*BEAQUA model, RO C500.

\*\*RO C700, RO C1200 models.

## Booster pumps



### Booster pump with transformer



Code	Packaging units	Model	Voltage
293212	1	UP-6000	24 V
293100	1	UP-7000	24 V
293200	1	UP-8000	36 V
293206	1	UP-9500	24 V
293209	1	UP-9600	24 V

### Booster pump without transformer



Code	Packaging units	Model	Voltage	Description
293211	1	UP-6000	24 V	Pump without transformer
293500	1	UP-7000	24 V	Pump without transformer
293600	1	UP-8000	36 V	Pump without transformer
293203	1	UP-9500	24 V	Pump without transformer
293208	1	UP-9600	24 V	Pump without transformer

### Replacements for Booster pumps



Code	Packaging units	Description
293213	1	Complete head for UP-6000
293700	1	Complete head for UP-7000
346800	1	Complete head for UP-8000
293204	1	Complete head for UP-9500
293213	1	Complete head for UP-9600

## Transformers for Booster pumps



Code	Packaging units	Voltage	Description	Connection
293301	1	240 Vac 50 Hz / 24 Vdc	Conventional (analogic) transformer 0.9 A for Columbia water dispensers. UP-7000	Aerial pump plug

Code	Packaging units	Voltage	Description	Connection
293300	1	100-240 Vac 50/60 Hz: 24 Vdc	Wall connection electronic transformer 1,25 A. UP-7000	C-Aerial pump plug



293400	1	240 Vac 50Hz 36 Vdc (3 pins)	Transformer 36 Vdc UP-8000	
--------	---	---------------------------------	----------------------------	--



Code	Packaging units	Voltage	Description	Connection
295207	1	100-240 Vac 50/60 Hz: 24 Vdc	Wall connection electronic transformer 1,25 A	C-EU-Jack



Code	Packaging units	Voltage	Description	Connection
295204	1	100-240 Vac 50/60 Hz: 24 Vdc	Electronic transformer 2A	F-EU-Jack



Code	Packaging units	Voltage	Description	Connection
293403	1	220 Vac 50/60 Hz: 24 Vdc.	Electronic transformer 24 Vdc 5A UP-9500/UP-9600A	F-EU-Jack



Code	Packaging units	Voltage	Description	Connection
295215	1	100-240 Vac 50/60 Hz: 24 Vdc	Electronic transformer 2A. No power supply cable included	Jack



Code	Packaging units	Description	Connection
771701	1	Power supply cable	F-EU

## Pressure switches



Code	Packaging units	Description	Connection
294100	1	Low pressure switch	1/4" F
294101	1	Low pressure switch double signal	1/4" F



Code	Packaging units	Description	Connection
294104	1	Low pressure switch	1/4" stem
294105	1	Low pressure switch double signal	1/4" stem



Code	Packaging units	Description	Connection
294200	1	Adjustable high pressure switch 20-40 psi (1 psi = 0.07 bar) for pump systems	1/4" F
294201	1	Adjustable high pressure switch 15-30 psi for systems without pump	1/4" F
294202	1	Adjustable high pressure switch 20-40 psi (1 psi = 0.07 bar) for pump systems double signal	1/4" F



Code	Packaging units	Description	Connection
294300	1	Adjustable high pressure switch 20-40 psi (1 psi = 0.07 bar)	1/4" M JACO



Code	Packaging units	Description	Connection
294301	1	Adjustable high pressure switch 20-40 psi (1 psi = 0.07 bar)	1/4" stem
294302	1	Adjustable high pressure switch 20-40 psi (1 psi = 0.07 bar) double signal	1/4" stem

**!** (1 psi = 0,07 bar)



## Hydraulic valves

### Shut-off valve



Code	Packaging units	Description	Connection
294400	1	4-ways shut-off valve with 6 screws and nuts	1/4" JACO



Code	Packaging units	Description	Connection
900134	1	Shut-off valve with quick connection	1/4" QC

### Check valves



Code	Packaging units	Description	Connection	
			Tube	Thread
294600	1	Insert-type SS check valve 1/8" M to 1/4" quick fitting	1/4"	1/8" M



Code	Packaging units	Description
294700	10	M 1/8" SS check valve



Code	Packaging units	Description
274900	10	Elbow F 1/4" - 1/8" for check valve 294700



Code	Packaging units	Description
275000	10	Elbow F 1/4" - JACO 1/4"

## Electrovalves



Code	Packaging units	Description	Connections
294801	1	24 VDC N.C. electrovalve (2007 Model) with filtering mesh	1/4" F

### Electrovalves with timer for autoflushing



Code	Packaging units	Description	Connections
652400	1	Autoflushing electrovalve with restrictor of 400 cc 24 Vdc N.C. for PJK-010 PC board	1/4" F



Code	Packaging units	Description	Connections
652401	1	Autoflushing electrovalve with restrictor of 400 cc 24 Vdc N.C. for PJK-260	1/4" F



Code	Packaging units	Description	Connections
652402	1	Assembly kit for autoflushing electrovalve with restrictor of 400 cc	1/4" F



Code	Packaging units	Description	Connections
729301	1	Autoflushing electrovalve with restrictor of 1100 cc 24 Vdc N.C. for direct flow RO systems	1/4" F

## Electronic boards



Code	Packaging units	Description	Model
295500	1	PCB + box + aquastop sensor set	PJK-018
295504	1	PCB + box + aquastop sensor set	PJK-260



Code	Packaging units	Description
771601	1	Aquastop leaking sensor replacement



Code	Packaging units	Description	Model
786301	1	Complete wiring for compact systems with PJK-260	PJK-260
658901	1	Complete wiring for compact systems with PJK-019 (leds for quality detector)	



Code	Packaging units	Description	Model
295700	1	Spare PCB for leaking sensor Aquastop	PJK-018



Code	Packaging units	Description	Model
611300	1	Spare PCB for quality sensor	PJK-019
611301	1	Spare PCB for quality sensor (9 Vdc battery)	PJK-019



Code	Packaging units	Description	Model
653700	1	Spare PCB for autoflushing	PJK-010



Code	Packaging units	Description	Model
6583XX	1	Leaking sensor, autoflushing, quality control and filter change timing	PJK-260
6583XX	1	Leaking sensor, autoflushing, quality control and filter change timing, back flushing, self diagnostics	PJK-266

Code depending on model of equipment (SO, PN, SN).



**Software and parameters depending on model.**

## Electronic boards



Code	Packaging units	Description	Model
759700	1	PCB for the CMA/Alison 4 Leds + button	PJK-013

Code	Packaging units	Description	Model
653703	1	PCB for the CMS/Sintra 3 Leds (Leaking)	PJK-028
653707	1	PCB for the CMS/Sintra 6 Leds (Leaking)	PJK-044

Code	Packaging units	Description	Model
653901	1	PCB for the Leds CIJ/Binature 1	PJK-042
653703	1	PCB for the Leds CIJ/Binature 2, 3, 4	PJK-028
295507	1	Frontal PCB with leds for domestic RO Advance Hydraulic	PJK-061
295506	1	Frontal PCB with leds for RO Sintra and Gutzzi	PJK-049
653709	1	Frontal PCB with leds for RO Senna and infinity	PJK-048

## Floating valves



### Level control

Code	Packaging units	Description
577200	1	Mechanical floating valve 1/4"



Code	Packaging units	Description
577300	1	Mechanical floating valve 1/4" with microswitch

## Accessories for faucets



Code	Packaging units	Description
262400	Bags of 25	O-ring for faucet spout. Models: Lewis and Oslo
262401	Bags of 25	O-ring for faucet spout. Models: Robin, Hike



Code	Packaging units	Description
262500	1	Biconic element from faucet inlet 1/4" tube

## Pressurized storage tanks

Double layer tank of the highest quality and service life.



### Specifications:

Internal membrane: butyl.  
 Internal coating: polypropylene liner.  
 Max. working pressure: 7 kg/cm<sup>2</sup>.  
 Pre-load pressure: 0.5 kg/cm<sup>2</sup>.



Code	Packaging units	Material	Diameter mm	Height mm	Capacity gallons	Total l.
262600	1	Steel	210	280	1,8	6,8



Code	Packaging units	Material	Diameter mm	Height mm	Capacity gallons	Total l.
263200	1	Stainless steel 280		360	3,2	12,1



Code	Packaging units	Description	Material	Diameter Ø mm	Height mm	Capacity gallons	Total
262701*	1	Tank for previous models	Stainless steel	230	360	2,2	8,3
262601**	1	Tank for latest models	Stainless steel	210	280	1,8	6,8

\* *ULTRA, CM, MAGMA, LADYWATER, ALISON, ADVANCE CS1 models.*

\*\* *SINTRA; ADVANCE CS3, INFINITY, SENNA, STARLINE, GUTZZI models.*



Code	Packaging units	Description	Material	Diameter Ø mm	Height mm	Capacity gallons	Total l.
263100	1	Tank DUO	Steel/Plast.	280	410	5,5	21
262703	1	Tank DUO	Steel/Plast.	250	370	4,2	16
262704	1	Tank DUO	Steel/Plast.	238	370	3,2	12

## Storage tanks



Code	Packaging units	Material	Diameter Ø mm	Height mm	Capacity gallons	Total l.	Real capacity at 3 bars
263300 *	1	Steel	390	580	10,7	40,6	23



Code	Packaging units	Material	Diameter Ø mm	Height mm	Capacity gallons	Total l.	Real capacity at 3 bars
263400 *	1	Steel	400	800	20	76	40



Code	Packaging units	Material	Diameter Ø mm	Height mm	Capacity gallons	Total l.	Real capacity at 3 bars
263401 *	1	Steel	450	780	30	115	64



Code	Packaging units	Material	Diameter Ø mm	Height mm	Capacity gallons	Total l.	Real capacity at 3 bars
263402 *	1	Steel	450	1000	40	150	79

\* Add connection kit code 263502.

### Storage tanks accessories

Code	Packaging units	Description
263502	1	Connection Kit for pressure tanks: 10,7/20/30/40 Gallons



Code	Packaging units	Description
263600	10	1/4" F - 1/4" M plastic square adaptor



Code	Packaging units	Description
263700	10	1/4" ball valve for tank
263800	10	3/8" ball valve for tank



Code	Packaging units	Description
952307	10	1/4" ball valve for tank
952308	10	3/8" ball valve for tank

## Brackets



Code	Packaging units	Material	Description
264100	1	Painted steel	2P 3 x 10" bracket + pump



Code	Packaging units	Material	Description
264400	1	Painted steel	2P 3 x 20" bracket + pump



Code	Packaging units	Material	Description
264500	1	Stainless steel	Wall bracket for faucet



Code	Packaging units	Material	Description
264200	1	Stainless steel	2P/3P 3 x 10" bracket



Code	Packaging units	Material	Connection
764800	1	1/4" wall mounting mixing valve	1/4" F



Code	Packaging units	Material	Connection
764803	1	Polyacetal wall mounting mixing valve	1/4" stem wall mounting



Code	Packaging units	Material	Connection
952400	1	Control valve	1/4" QC
952401	1	Control valve	3/8" QC

## Installation



Code	Packaging units	Description
261900	1	1/4" extension for faucet



Code	Packaging units	Description
262000	10	3/4" F 3/4" M wall extension



Code	Packaging units	Description
262100	10	3/4" F 3/4" M wall extension with 1/4" connection for valve



Code	Packaging units	Description
262200	10	3/4" F 3/4" M wall extension with sliding nut



Code	Packaging units	Description
262202	10	3/4" F 3/4" M wall extension with sliding nut and 1/4" F connection for valve



## Connection



Code	Packaging units	Description
264700	1	Drain clamp 1/4"



Code	Packaging units	Description	Connection
953169	10	Drain clamp - Quick connection	1/4"
953170	10	Drain clamp - Quick connection	3/8"



Code	Packaging units	Description
264800	10	1/2" - 1/2" Wall adaptor + 1/4" F drill hole
264900	10	3/8" - 3/8" Wall adaptor + 1/4" F drill hole



Code	Packaging units	Description
262302	10	1/2" - 1/2" wall adaptor + 1/4" drill hole with sliding nut
264901	10	3/8" - 3/8" wall adaptor + 1/4" drill hole with sliding nut



Code	Packaging units	Description
265000	1	Ball valve tube 1/4" male thread 1/4"
265100	1	Ball valve tube 3/8" male thread 1/4"



Code	Packaging units	Description
265200	1	Ball valve male thread 1/4" female thread 1/4"
265201	1	Ball valve male thread 1/8" female thread 1/4"

## Restrictores de flujo



Code	Packaging units	Description
265400	10	1/4" perforated saddle valve for water inlet



Code	Packaging units	Description
717800	1	1/4" - 1/8" needle valve for demonstration briefcase



Code	Packaging units	Description	Flow	Connection
953160	5	Flow restrictor with quick fitting	300 cc	1/4"
953161	5	Flow restrictor with quick fitting	420 cc	1/4"
953162	5	Flow restrictor with quick fitting	550 cc	1/4"
268401	5	Flow restrictor with quick fitting	2000 cc	1/4"



Code	Packaging units	Description	Flow	Connection
266600	5	Female flow restrictor F 1/4" thread	300 cc	F 1/4"
266800	5	Female flow restrictor F 1/4" thread	420 cc	F 1/4"
267100	5	Female flow restrictor F 1/4" thread	550 cc	F 1/4"
267200	5	Female flow restrictor F 1/4" thread	600 cc	F 1/4"
267300	5	Female flow restrictor F 1/4" thread	800 cc	F 1/4"
268400	5	Female flow restrictor F 1/4" thread	1000 cc	F 1/4"
268402	5	Female flow restrictor F 1/4" thread	1500 cc	F 1/4"



Code	Packaging units	Description	Flow
752900	5	Restrictor insert for JACO	300 cc



Code	Packaging units	Description	Flow
752905	5	Restrictor insert for Tube 1/4"	300 cc

## Clips



Code	Packaging units	Description
267400	10	Clip for 2" cartridges



Code	Packaging units	Description
267500	10	Clip for 2.5" cartridges and membrane housings



Code	Packaging units	Description
267600	10	Double clip for 2" x 2.5" cartridges



Code	Packaging units	Description
267700	10	Double clip for 2.5" x 2.5" cartridges
764400	10	Double clip for 2" x 2" cartridges



Code	Packaging units	Description
764402	1	Double clip for 2" cartridges
764403	1	Double clip for 2.5" cartridges



Code	Packaging units	Description
751200	1	Belt wrench for membrane and filter housings

## Shower filter

Removes chlorine and other chlorinated substances.



Filtering load: KDF and GAC activated carbon.  
Max. temperature: 80 °C.



Code	Packaging units	Description	Connection
289508	1	Shower Filter	1/2" F-M



Code	Packaging units	Description
289603	2	Replacement cartridge shower Filter

**SHOWER FILTER** from Puricom Europe  
Protection and comfort for your skin.



Our Shower Filter will give you the maximum comfort in your daily shower, leaving your skin softer than ever by avoiding chemical products from water.


Give your clients a useful and comfortable gift.



GAC ACTIVATED CARBON

KDF® 55

GAC ACTIVATED CARBON

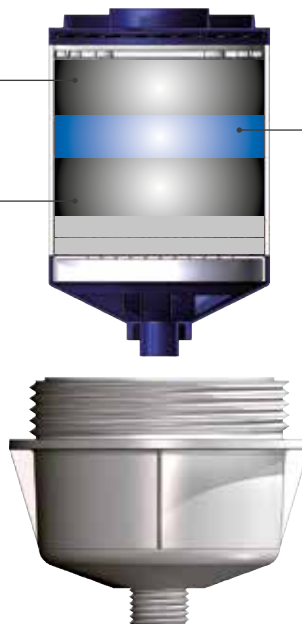

Make the most of your technical assistance service (TAS), by offering an economical but useful product that your clients will appreciate.

Seize the opportunity when contacting your clients and offer them a product that will protect their skin and the skin of their family.



## Low flow faucet aerator for reducing water consumption

Save water and contribute to the preservation of our environment.



Code	Packaging units	Description	Presentation
754113	20	Faucet water saver 1/2 M	1 unit blister



Code	Packaging units	Description	Presentation
754105	20	Faucet water saver 1/2 F	1 unit blister



Code	Packaging units	Description	Presentation
754106	26	Shower water saver M	1 unit blister



Code	Packaging units	Description	Presentation
754108	10	Kitchen water saver M	1 unit blister

## DMFIT polyethylene tube (inches)

**DMfit**<sup>®</sup>  
 Conectores rápidos


Code	Packaging units	Description	OD (outside diameter)	ID (internal diameter)
956002	300 m	1/4 White tube DM	1/4"	0,170
956003	300 m	1/4 Blue tube DM	1/4"	0,170
956005	200 m	5/16" Natural tube DM	5/16"	0,216
956006	200 m	5/16" Black tube DM	5/16"	0,216
956007	200 m	5/16 White tube DM	3/8"	1/4"
956008	200 m	5/16 Blue tube DM	5/16"	0,216
956011	150 m	3/8 White tube DM	3/8"	1/4"
956012	150 m	3/8 Blue tube DM	3/8"	1/4"

**DMfit**<sup>®</sup>  
 Conectores rápidos

## DMFIT polyethylene tube (metric)

Code	Packaging units	Description	OD (outside diameter)	ID (internal diameter)
956015	500 m	4 Black tube DM	4	2,5
956031	500 m	4 Red tube DM	4	2,5
956018	300 m	6 Natural tube DM	6	4
956019	200 m	6 Black tube DM	6	4
956020	200 m	6 White tube DM	6	4
956021	300 m	6 Blue tube DM	6	4
956022	200 m	8 Natural tube DM	8	6
956023	200 m	8 Black tube DM	8	6
956024	200 m	8 White tube DM	8	6
956025	200 m	8 Blue tube DM	8	6
956027	150 m	10 Black tube DM	10	7
956033	100 m	12 Black tube DM	12	9