

→ Direct Flow Reverse Osmosis

# RO ALTYUM 3.0

(Ref. 910601)

## SPECIFICATIONS

PRODUCTION	2 lpm
WEIGHT	12 kg
INLET TEMPERATURE (máx.-min.)	38°C / 5°C
INLET TDS	1500 ppm
INLET PRESSURE	4 bar - 1 bar (400kPa-100kPa)
MEMBRANE	600 GPD
FAUCET	Smart faucet
PUMP	High performance Diaphragm Booster Pump
POWER SUPPLY	24 Vdc
EXTERNAL ADAPTER	100-240V. 50/60Hz: 24Vdc
PREFILTER	mixed pp 10 microns+high quality block carbon
POSFILTER	high quality carbon



FILTER CONTROL



QUALITY CONTROL



SOUND WARNINGS



SMART FAUCET



LED STATUS



VERSATILITY



HIGH EFFICIENCY



AQUASTOP SYSTEM




**CARTRIDGES OF EXCLUSIVE CONNECTION**

## ORIGINAL CONSUMABLES

Cartridge combi CFRO (Ref. 910602)

Membrane RO 600 GDP (Ref. 910603)

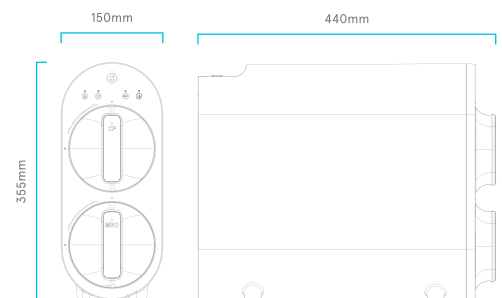

WLG (B-60326279), is member of the Water Quality Association.



ACCREDITED BY ENAC  
Certif. nº 34/5200/14/0712

The trading of water treatment and household appliances as well as designing and teaching of non-official training courses related with its technology are certified and comply with the UNE-ISO-9001 for WLG (B-60326279).



WLG (B-60326279) is an Aqua España member, who belongs to Aqua Europa (Federation of European nation associations).



WLG (B-60326279), has the rights granted for Authorized Economic Operator with number ESAEOF1800008U6 and 13/02/2018 as a date of entry of the authorization.