

→ Reverse Osmosis

RO LEVANTE (Ref. 910421)

Direct flow system

DESCRIPTION

5 filtration stages system
Installation kit
Smart tap with status warnings
High performance RO membrane
Integrated hydraulic circuit
Easy maintenance

SPECIFICATIONS

DIMENSIONS	414 mm x 130 mm x 445 mm
WEIGHT	12,45 kg
FLOW	1,5-2 LPM
INLET TEMPERATURE RANGE	38 °C - 5 °C
INLET TDS	1500 ppm
INLET PRESSURE	1 / 2,5 bares 100 - 250 kPa
MEMBRANE	600 GPD
TAP	Smart faucet
PUMP	Booster
POWER SUPPLY	24 Vdc 75 W
ELECTRONICAL ADAPTER	100 - 240 V 50/60Hz

**ELECTRONIC
LEAKING SENSOR**

**QUALITY WATER
STATUS WARNINGS**



ORIGINAL CONSUMABLES

10 microns BLOCK carbon postfilter (Ref: 910423)

BLOCK carbon + PP sediment prefilter (Ref: 910422)

600 GPD RO membrane (Ref: 910424)



QUALITY CONTROL



DOUBLE FLOW



FILTER CONTROL




CAPSULATED MEMBRANE



PRESSURE PUMP



LED STATUS

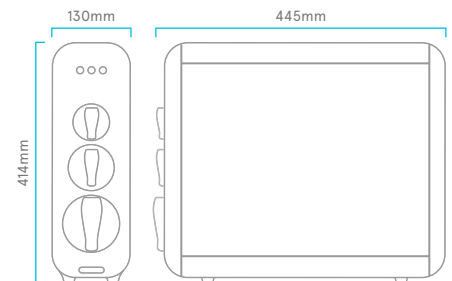

WLG (B-60326279), is member of the Water Quality Association.



ACCREDITED BY ENAC
Certif. nº 34/5200/14/0712

The trading of water treatment and household appliances as well as designing and teaching of non-official training courses related with its technology are certified and comply with the UNE-ISO-9001 far WLG (B-60326279).



WLG (B-60326279) is an Aqua España member, who belongs Aqua Europa (Federation of European nation associations).



WLG (B-60326279), has the rights granted for Authorized Economic Operator with number ESAEOF18000008U6 and 13/02/2018 as a date of entry of the authorization.