

→ Reverse osmosis

# RO STRYM

(Ref.910493)

Direct Flow system

## DESCRIPTION

5-stage equipment  
Installation kit  
Intelligent faucet with status messages  
High-performance membrane with self-flushing  
Integrated hydraulic circuit  
Easy maintenance

## SPECIFICATIONS

WEIGHT	12,5 kg
FLOW	2 lpm
TEMPERATURE (max. - min.)	38 °C - 5 °C
INLET TDS (max.)	1500 ppm
PRESSURE (max. - mmn.)	4 - 1 bares (400kPa - 100kPa)
MEMBRANE	800 GPD
FAUCET	Smart faucet
PUMP	Booster
POWER SUPPLY	24VDC / 90W
EXTERNAL ADAPTER	100-240VAC 50/60 Hz 5A



QUALITY CONTROL



DOUBLE FLOW



FILTER CONTROL



CAPSULATED MEMBRANE



FLUSHING READY



SOUND WARNINGS



SMART FAUCET



LED STATUS




**ELECTRICAL LEAK  
SENSOR ELECTRICAL**

**WATER QUALITY  
WARNING**

## ORIGINAL CONSUMABLES

Combination filter pp 5 µm+carbon Block (Ref. 910507)

Membrane RO 800 GPD ( Ref. 910508)

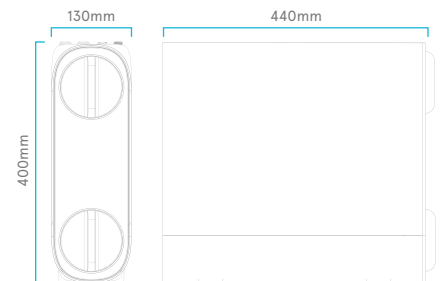

WLG (B-60326279), is member of the Water Quality Association.



ACCREDITED BY ENAC  
Certif. nº 34/5200/14/0712

The trading of water treatment and household appliances as well as designing and teaching of non-official training courses related with its technology are certified and comply with the UNE-ISO-9001 far WLG (B-60326279).



WLG (B-60326279) is an Aqua España member, who belongs Aqua Europa (Federation of European nation associations).



WLG (B-60326279), has the rights granted for Authorized Economic Operator with number ESAEOF18000008U6 and 13/02/2018 as a date of entry of the authorization.