

→ Reverse osmosis Direct Flow system

VYRTA 800 GPD

(Ref.910475)

SPECIFICATIONS

| | |
|---------------------------------|--|
| FLOW | 2,2 lpm |
| WEIGHT | 12 kg |
| INLET TEMPERATURE (max. - min.) | 38°C / 5°C |
| INLET TDS (max.) | 1500 ppm |
| INLET PRESSURE | 4 bar - 1 bar (400kPa-100kPa) |
| PREFILTER | Mixed filter carbon pp 5 microns+ Carbon block high quality |
| POSTFILTER | High quality carbon |
| MEMBRANE | 800GPD |
| TAP | Smart faucet |
| PUMP | High performance diaphragm |
| POWER SUPPLY | 24 Vdc |
| EXTERNAL ADAPTER | 100-240V. 50/60Hz: 24Vdc |



FILTER CONTROL



QUALITY CONTROL



SOUND WARNINGS



SMART FAUCET



LED STATUS





VERSATILITY



HIGH EFFICIENCY



AQUASTOP SYSTEM

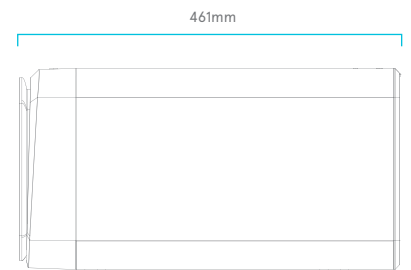

ORIGINAL CONSUMABLES

| |
|-----------------------------|
| Post Carbon (Ref. 910480) |
| Combi filter (Ref. 910479) |
| RO membrane (Ref. 910481) |



WLG (B-60326279), is member of the Water Quality Association.



ACCREDITED BY ENAC
Certif. nº 34/5200/14/0712

The trading of water treatment and household appliances as well as designing and teaching of non-official training courses related with its technology are certified and comply with the UNE-ISO-9001 far WLG (B-60326279).



WLG (B-60326279) is an Aqua España member, who belongs Aqua Europa (Federation of European nation associations).



WLG (B-60326279), has the rights granted for Authorized Economic Operator with number ESAE0F18000008U6 and 13/02/2018 as a date of entry of the authorization.